

< Line - Up >

B C A - T L


Mount Type/Shape

L	Right Angle
S	Straight


Built-in IC

T	Cable Driver (TX)
R	Cable Equalizer (RX)

Right Angle

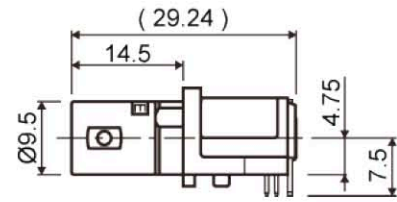


Straight



< Specifications >

Model	BCA-TL	BCA-TS	BCA-RL	BCA-RS
Support Format	3G-SDI, HD-SDI, SD-SDI, DVB-ASI			
Supply Voltage	3.3V ± 5%			
Current Consumption	50mA		70mA	
Operaton Temperature	-25°C ~ +85°C			
Output Signal Amplitude	800mVpp ± 10%		-	
Equalizing Cable Length	-		(3G-SDI) 120m with L-5CFB	
Weight	Approx. 9.0g			
Compliant	SMPTE 259M, 292M, 424M, BTA S-004C, EN50083-9			
Enviroment	RoHS			

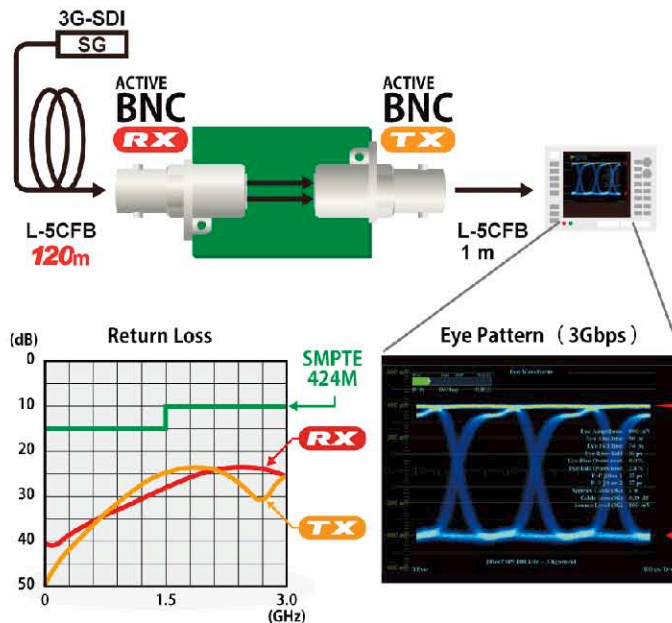

<http://www.canare.co.jp>