

Product Specification (L-8CUHD)

Canare Electric Co., Ltd

1. **Scope** This product specification covers the performance of the 75Ω Coaxial cable.

2. **General Specifications**

(1) **Product Name** 75Ω Coaxial Cable

(2) **Model Name** L-8CUHD

(3) **Construction and Appearance** As shown in Fig.1 and Table 1

Fig. 1

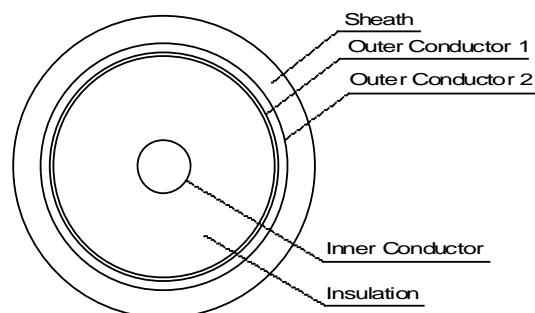


Table 1

Item	Standard Value	Note
No. of Conductor	1	
Inner Conductor	Construction (qty/mm)	1/2.00A
	Nom. Cross Section Area (mm ²)	3.14
	Overall Diameter (mm)	2.00
Insulation	Thickness (mm)	3.13
	Overall Diameter (mm)	8.26
Outer Conductor 1	Thickness (mm)	0.04
	Overall Diameter (mm)	8.3
Outer Conductor 2	Construction (carr/end/mm)	24/ 8/0.16TA
	Pitch (mm)	<= 40
	Overall Diameter (mm)	9.0
Sheath	Thickness (mm)	1.05
	Color	Blk. Brn. Red. Orn. Yel. Grn. Blu. Ppl. Gry. Wht Cstom colors available
	Marking	12G-SDI / CXP-12 75Ω Coaxial Cable L-8CUHD CANARE <Year Code> MADE IN JAPAN E316792 (UL) CMR 75°C 13AWG OR C(UL) CMR 75°C 13AWG
Overall Diameter (mm)	11.1	—

(4) **Weight** Approx. 14.1kg/100m

(5) **Package** 100m: Coil
Over 200m: Wooden reel

3. Rating, Standard**(1) Rated Voltage** AC 60Vrms**(2) Temperature Range** -30°C ~ +75°C**(3) Applicable Specifications** UL Type CMR**4. Electrical Characteristics**

Item		Standard Value	Test Method
D.C. Resistance	Inner Conductor	$\leq 5.8\Omega/\text{km}$ (20°C)	JIS C 3005
	Outer Conductor	$\leq 6.3\Omega/\text{km}$ (20°C)	JIS C 3005
Insulation Resistance		$\geq 1000\text{M}\Omega \cdot \text{km}$	JIS C 3005
Voltage Proof		AC1000V 1minute Not Breakdown	JIS C 3005
Characteristic Impedance		75±3Ω	ANSI/SCTE 68 2008
Nominal Capacitance		52nF/km (1kHz)	JIS C 3502
Nominal Attenuation		10MHz: 1.2dB/100m 30MHz: 2.0dB/100m HDTV 72MHz: 2.9dB/100m D2 NTSC 88MHz: 3.2dB/100m D2_PAL 135MHz: 3.8dB/100m D1 180MHz: 4.4dB/100m 270MHz: 5.4dB/100m 750MHz: 9.2dB/100m HD-SDI 1.3GHz: 12.3dB/100m 1.5GHz: 13.3dB/100m 1.5625GHz: 13.6dB/100m CXP-3 2.0GHz: 15.5dB/100m 2.5GHz: 17.5dB/100m 3.0GHz: 19.4dB/100m 3G-SDI 3.125GHz: 19.8dB/100m CXP-6 6.0GHz: 28.5dB/100m 12G-SDI 6.25GHz: 29.2dB/100m CXP-12	JIS C 3502

5. Mechanical Characteristics

Item		Standard Value	Test Method
Tensile properties of Sheath	Tensile strength	$\geq 13.8 \text{ MPa}$	JIS C 3005
	Elongation	$\geq 230 \%$	JIS C 3005
The permission tension		$\leq 216 \text{ N}$	-
Permission bend radius		On/after installation finished: More than 6 times of the cable O.D. Process of wiring: More than 15 time of the cable O.D.	-

6. Environment Characteristics

Item	Standard Value	Test Method
Flame Retardance	Flame must extinguish naturally within 60 seconds.	Perform inclination test according to JIS C 3005.
	The temperature of thermocouple is recorded every 10s at 12ft. (3.66m), and must not exceed 454.4°C. The flame spread must not exceed 12ft. (3.66m).	The flame test specified in UL1666.

Note: Testing must be performed under standard conditions set down in “JIS C 60068-1 General Environmental Testing Rules (Electric/Electronics).”

Standard Conditions: Unless otherwise specified, all tests and measurements should be performed within a normal temperature range of 15-35°C, a relative humidity of 25-75%, and an atmospheric pressure of 86-106kPa.